


**SUNBOLTS®**

*Photovoltaic Connection*

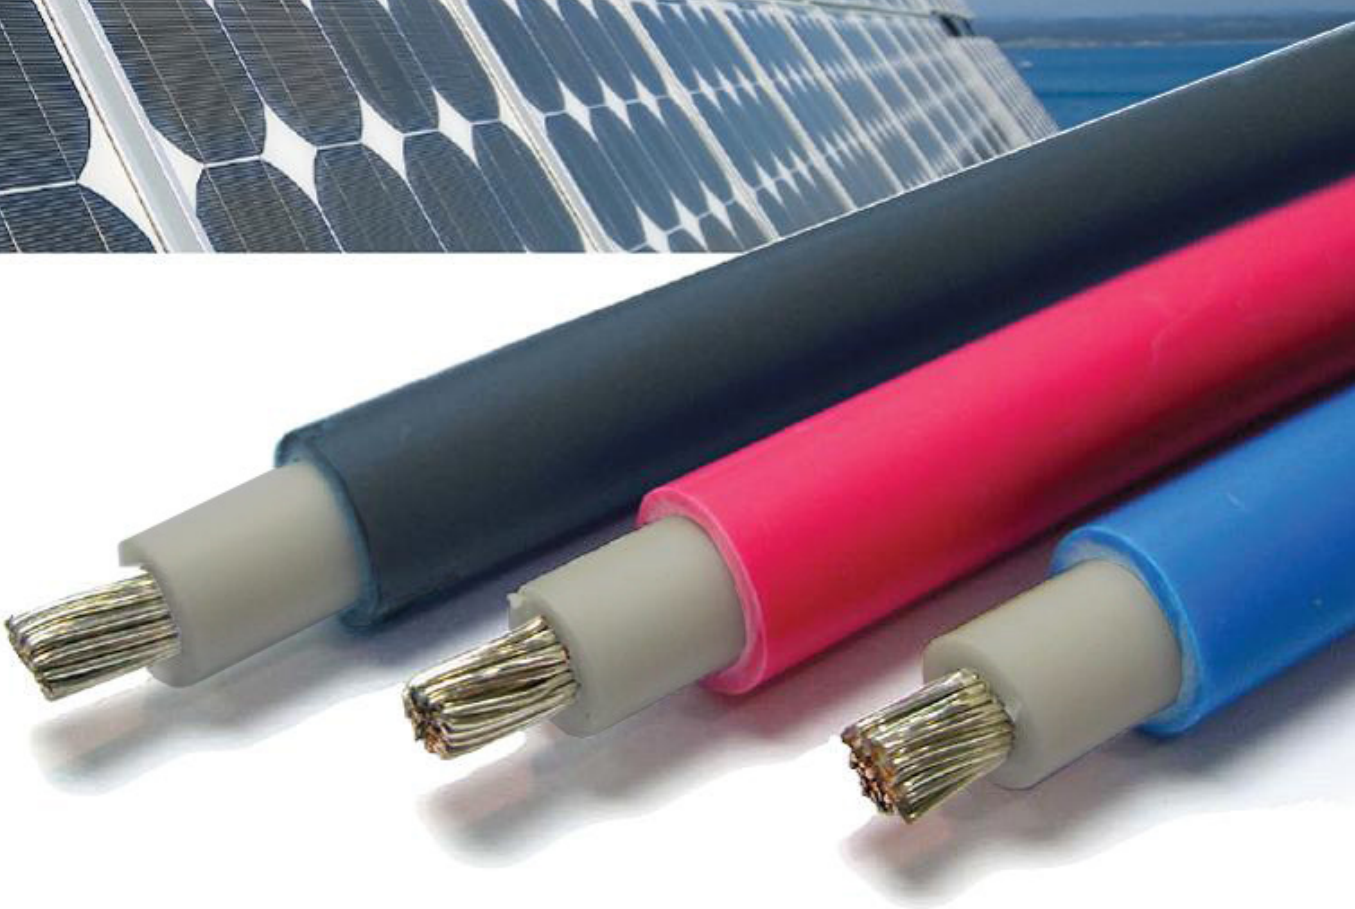


[www.sunbolts.com](http://www.sunbolts.com)

**BizLink**



## Cables

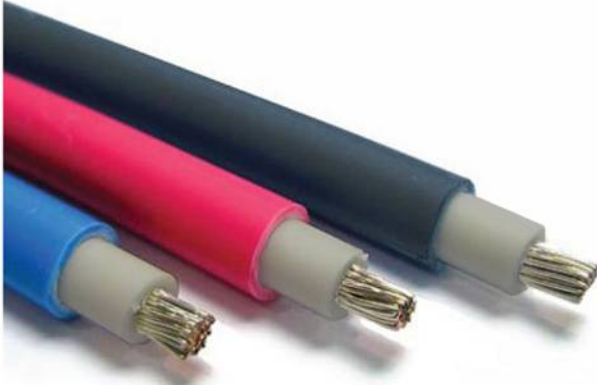

### Technical Data

#### Materials

Conductor: Tinned copper wire  
 Insulation: XLPO  
 Jacket: XLPE

#### Electrical

Rated voltage TÜV: 1000V AC, 1800V DC  
 Rated voltage UL: 600V AC  
 Rated current: see table

#### Mechanical

Wire size range: 2.5, 4.0, 6.0 mm<sup>2</sup>  
 AWG 14, 12, 10, 8, 6  
 Min. bending radius:  
 4 x OD (see table for ODs)

#### Environmental

Temperature Range TÜV: -40°C up to +90°C  
 Temperature Range UL: -40°C up to +90°C  
 Flame tested: EN 60332-1-2  
 Halogen Free  
 RoHS Compliant

#### Safety Approval and Standards

UL: Approved, File# E318358, E321658  
 TÜV: Approved, Cert# R50108426

### TÜV Cable (1000V AC, 1800V DC)



Cross Section [mm <sup>2</sup> ]	Conductor Composition [mm <sup>2</sup> ]	Outer Diameter [mm]	TÜV Rated Current* [A]	Conductor Resistance [Ω/km]
2.5	50/0.25	6.45±0.2	39	8.21
4.0	56/0.30	6.55±0.2	52	5.09
6.0	84/0.30	7.45±0.2	67	3.39

\* single cable on surfaces  
 Available in Black, Red or Blue

### UL Cable (600V AC)



Cross Section [AWG]	Conductor Composition [mm <sup>2</sup> ]	Outer Diameter [mm]	UL Rated Current [A]	Conductor Resistance [Ω/km]
14	43/0.25	5.9±0.15	27	8.62
12	48/0.30	6.4±0.15	36	5.43
10	76/0.30	7.0±0.15	47	3.41
8	65/0.404	10.0±0.2	70	2.27
6	105/0.404	11.0±0.2	100	1.43

Available in Black, Red or Blue for AWG 14, 12 and 10  
 Available in Black only for AWG 8 and 6



### Dual Certified Cable (1000V / 600V AC)



Cross Section [AWG/mm <sup>2</sup> ]	Conductor Composition [mm <sup>2</sup> ]	Outer Diameter [mm]	Dual Rated Current* [A]	Conductor Resistance [Ω/km]
14 / 2.5	50/0.25	6.45±0.2	39	8.21
12 / 4.0	56/0.30	6.55±0.15	52	5.09
10 / 6.0	84/0.30	7.45±0.2	67	3.39

\* single cable on surfaces  
 Available in Black, Red or Blue

*The specifications are subject to change without notice!*

### BizLink Headquarters

3400 Gateway Blvd. Fremont,  
 CA 94538, USA  
 Tel +1.510.252.0786  
 Fax +1.510.252.1178  
 sales@bizlinktech.com

### International Sales

Europe +353.1.462.6126    Japan +81.3.6279.9578    Taiwan +886.2.8226.1000  
 China +86.755.3384.5888    Malaysia +604.399.4428    India +91.40.4020.7673