


SUNBOLTS®

Photovoltaic Connection

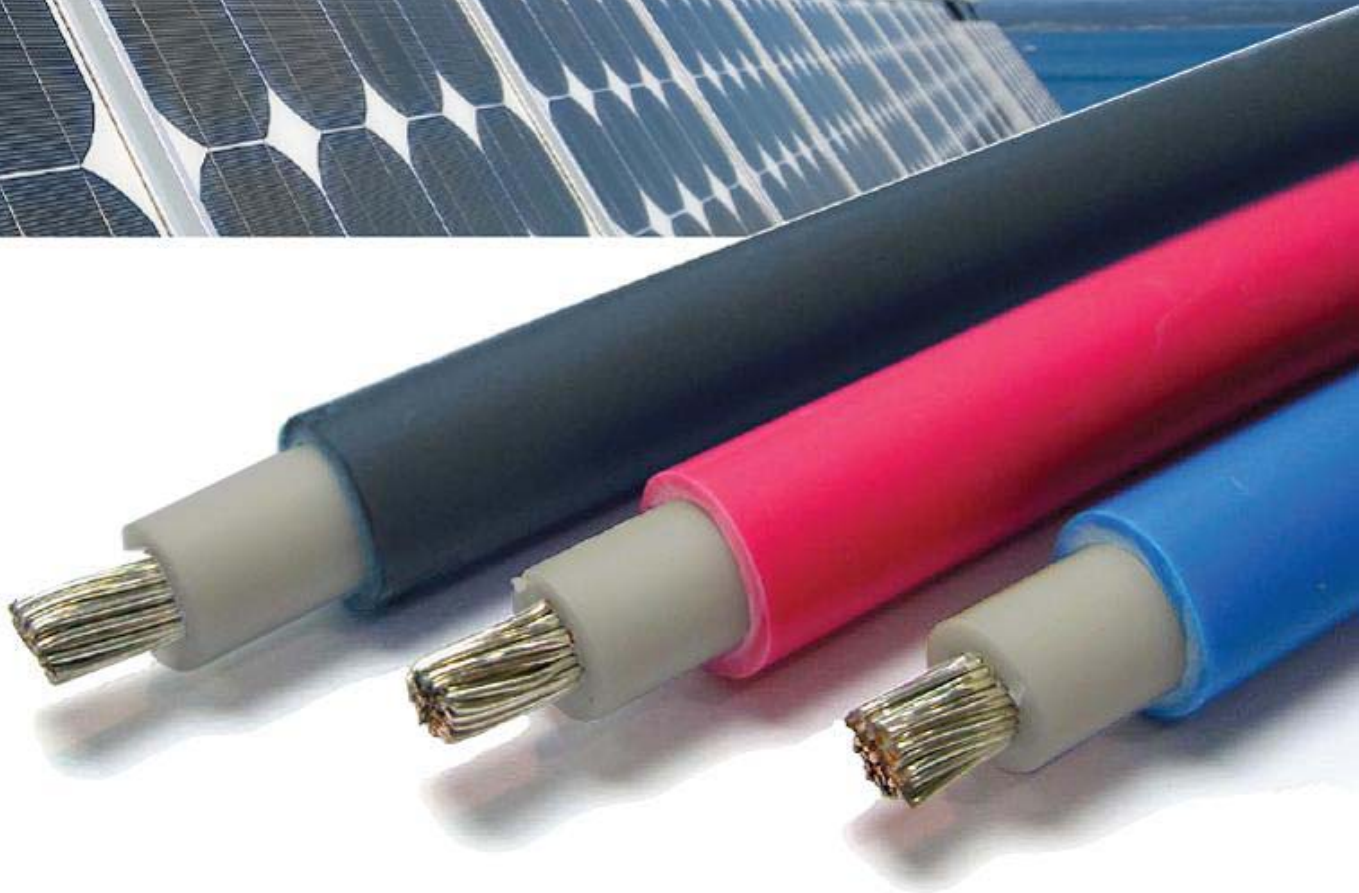

www.sunbolts.com

BizLink



Cables



Technical Data

Materials

Conductor: Tinned copper wire
 Insulation: XLPO
 Jacket: XLPE

Electrical

Rated voltage TÜV: 1000 V DC
 Rated voltage UL: 600 V DC
 Rated current: see table

Mechanical

Wire Size Range: 2.5, 4.0, 6.0 mm²
 AWG 14, 12, 10
 *Min. bending radius: 48mm for 4.0 mm²


Environmental

Temperature Range TÜV: -40°C up to +85°C
 Temperature Range UL: -40°C up to +90°C
 Flame tested: EN 50265-2-1
 Halogen Free
 RoHS Compliant

Safety Approval and Standards

UL approved, File# E338358
 TÜV certified, Cert# 50108426

TYO-1 2 00 - 400

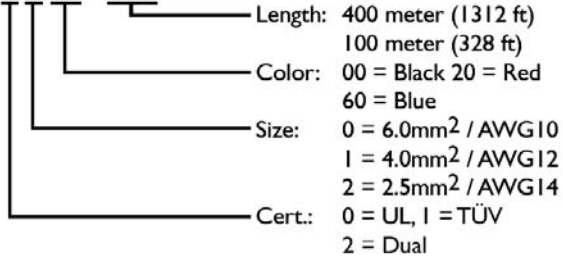

TÜV Cable (1000 V DC)



Part number	Cross Section [mm ²]	Conductor Composition [mm ²]	Outer Diameter [mm ²]	Rated Current [A]	Conductor Resistance [Ω/km]	Color
TYO-1200	2.5	50/0.25	6.45±0.2	39	8.21	Black
TYO-1220	2.5	50/0.25	6.45±0.2	39	8.21	Red
TYO-1260	2.5	50/0.25	6.45±0.2	39	8.21	Blue
TYO-1100	4.0	56/0.30	6.55±0.2	52	5.09	Black
TYO-1120	4.0	56/0.30	6.55±0.2	52	5.09	Red
TYO-1160	4.0	56/0.30	6.55±0.2	52	5.09	Blue
TYO-1000	6.0	84/0.30	7.45±0.2	67	3.39	Black
TYO-1020	6.0	84/0.30	7.45±0.2	67	3.39	Red
TYO-1060	6.0	84/0.30	7.45±0.2	67	3.39	Blue

UL Cable (600 V DC)



Part number	Cross Section [AWG]	Conductor Composition [mm ²]	Outer Diameter [mm ²]	Rated Current [A]	Conductor Resistance [Ω/km]	Color
TYO-0200	14	43/0.25	5.9±0.15	27	8.62	Black
TYO-0220	14	43/0.25	5.9±0.15	27	8.62	Red
TYO-0260	14	43/0.25	5.9±0.15	27	8.62	Blue
TYO-0100	12	48/0.30	6.4±0.15	36	5.43	Black
TYO-0120	12	48/0.30	6.4±0.15	36	5.43	Red
TYO-0160	12	48/0.30	6.4±0.15	36	5.43	Blue
TYO-0000	10	76/0.30	7.0±0.15	47	3.41	Black
TYO-0020	10	76/0.30	7.0±0.15	47	3.41	Red
TYO-0060	10	76/0.30	7.0±0.15	47	3.41	Blue

Dual Certified Cable (1000 V DC / 600 V DC)



Part number	Cross Section [AWG/mm ²]	Conductor Composition [mm ²]	Outer Diameter [mm ²]	Rated Current [A]	Conductor Resistance [Ω/km]	Color
TYO-2200	14 / 2.5	50/0.25	6.45±0.2	39	8.21	Black
TYO-2220	14 / 2.5	50/0.25	6.45±0.2	39	8.21	Red
TYO-2260	14 / 2.5	50/0.25	6.45±0.2	39	8.21	Blue
TYO-2100	12 / 4.0	56/0.30	6.55±0.15	52	5.09	Black
TYO-2120	12 / 4.0	56/0.30	6.55±0.15	52	5.09	Red
TYO-2160	12 / 4.0	56/0.30	6.55±0.15	52	5.09	Blue
TYO-2000	10 / 6.0	84/0.30	7.45±0.2	67	3.39	Black
TYO-2020	10 / 6.0	84/0.30	7.45±0.2	67	3.39	Red
TYO-2060	10 / 6.0	84/0.30	7.45±0.2	67	3.39	Blue

The specifications are subject to change without notice!

BizLink Headquarters

3400 Gateway Blvd. Fremont,
 CA 94538, USA
 Tel +1.510.252.0786
 Fax +1.510.252.1178
 sales@bizlinktech.com

International Sales

Europe +353.1.462.6126 Japan +81.3.6279.9578 Taiwan +886.2.8226.1000
 China +86.755.3384.5888 Malaysia +604.399.4428 India +91.40.4020.7673